


# PCIe x1 to 4-port Gigabit Ethernet Card (Intel Chipset) (ER3016)

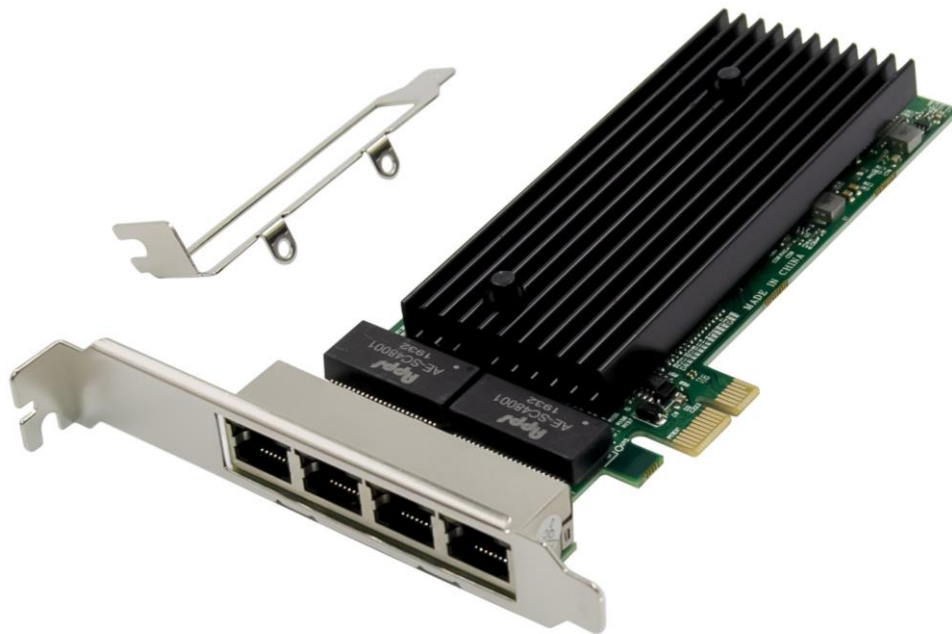

## **Introduction:**

EiRA PCIe Quad-Port Gigabit Network Card provides 4\*RJ45 1000mbps ports. It adopts Intel high performance Gigabit network controller JL82576EB. By providing unparalleled features of virtualization, flexible features, and proven reliable performance, it solves the high requirements of the generation data center, it has Quad 1Gbps RJ45 port which can setup a long-distance link with a file server or a remote workstation.

## **Product Highlights:**

- PCI-Express host interface specification v2.1 with 5GT/s BUS width
- Complies with PCI Bus Power Management Interface Specification Rev1.2
- PCI-Express lanes: x1
- Complies with Quad port 1GbE RJ45 port
- Onboard with 2xJL82576EB chipset
- Complies with the IEEE802.3ab, IEEE802.3u and IEEE802.3 specifications
- Supports with 10/100/1000Mbps transmit speeds
- Half duplex at 10/100Mbps operation and full duplex operation at all supported speeds
- Layer 2 functions: IEEE 802.3x Flow Control - IEEE 802.1q VLAN
- Supports Receive-side scaling (RSS)
- Supports IPv 4, IPv 6 protocols
- Supports Jumbo Frames up to 9.5K
- Supports UDP.TCP and IP Checksum offloading
- Statistics for management and RMON

# PCIe x1 to 4-port Gigabit Ethernet Card (Intel Chipset) (ER3016)

- Support for virtual machines device queues
- Next Generation VMDq Support (8VMs)
- Interrupt throttling control to limit maximum interrupt rate and improve CPU usage

## Technical Specifications:

<b>Brand</b>	<b>EiRA</b>
<b>SKU Code</b>	ER3016
<b>Product model</b>	PCIe x1 to 4-port Gigabit Ethernet Card (Intel 82576 Chipset)
<b>Chipset</b>	Intel 82576
<b>Form Factor</b>	Plug-in Card with Small Form Factor Support
<b>Small/Low Profile Bracket</b>	Provided
<b>PCIe Specification Revision</b>	PCIe 2.1
<b>PCI-Express Transfer Rate</b>	5 GT/s
<b>Input Bus Interface</b>	PCI Express x1 - Compatible with x1/x4/x8/x16 slots
<b>Output Interface</b>	4 * RJ45 Gigabit LAN ports
<b>Data Transfer Rate</b>	10/100/1000 Mbps half-duplex 20/200/2000 Mbps full-duplex
<b>Dimensions</b>	158 x 69 mm
<b>Weight</b>	142 gms
<b>System supported</b>	FreeBSD, Linux , VMWare ESXi, Win7/ Win-server2012/ Win-server2008/ Win8/ Win8.1/Win-server2016/win10/win11
<b>Warranty*</b>	1 year

## Package content

- 1 x PCIe x1 JL82576EB Quad-Port Gigabit Network adapter
- 1 x User's Manual
- 1 x CD Driver
- 1 x Low profile bracket



## System Requirements

- FreeBSD, Linux , VMWare ESXi, Win7/ Win-server2012/ Win-server2008/ Win8/Win8.1/Win-server2016/win10/ win11
- One available PCI Express x1/x4/x8/x16 slot

## Cabling Requirements:

### Intel 1 Gigabit adapters

- For 1000BASE-T or 100BASE-TX, use Category 5 or Category 5e wiring, twisted 4-pair copper:
- Make sure you use Category 5 cabling that complies with the TIA-568 wiring specification. For more information on this specification.
- Length is 100 meters max.
- Category 3 wiring supports only 10Mbps

**CAUTION: If using less than 4-pair cabling, you must manually configure the speed and duplex setting of the adapter and the link partner. In addition, with 2-pair and 3-pair cabling the adapter can only achieve speeds of up to 100Mbps**

- For 100BASE-TX, use Category 5 wiring.
- For 10BASE-T, use Category 3 or 5 wiring

## Hardware installation

1. Turn off the computer and unplug the power cord
2. Remove the computer cover and the adapter slot cover from the slot that matches your adapter
3. Insert the adapter edge connector into the slot and secure the bracket to the chassis
4. Replace the computer cover, then plug in the power cord
5. Power on the computer

## Install Drivers and software

### Windows Operating Systems

1. You must have administrative rights to the operating system to install the drivers.
2. Insert the CD driver bound with Intel network driver into your CD-ROM drive (also you can download the latest drivers from [support website](#)):
3. If the Found New Hardware Wizard screen is displayed, click Cancel
4. Start the autorun located in the software package, the autorun may automatically start after you have extracted files.
5. Click install Drivers and Software
6. Follow the instructions in the install wizard to finish it.

### Installing Linux Drivers from Source Code

1. Download and expand the base driver tar file.
2. Compile the driver module.
3. Install the module using the modprobe command.
4. Assign an IP address using the ifconfig command.



## PCIe x1 to 4-port Gigabit Ethernet Card (Intel Chipset) (ER3016)

### **Support:**

If you have further questions, please contact our customer support

For Technical support, please contact our team on number +91-8800692207, on working days, from Monday to Saturday, between 11AM to 5:30PM

You may also check this link for all support options.

<https://eiratek.com/customer-support/>

EIRATEK