

EiRA TEK

Scan to view website



www.eiratek.com



HAVE ELECTRONICS JUNK?
Visit our website for proper disposal method.
<https://www.eiratek.com/e-waste-management/>



ER2006SUC5

USER MANUAL


USB Type C to **5 in 1** Multiport Hub

HDMI (4K@30Hz) + RJ45 (100M) + USB-C (PD 3.0) + USB3.0 + USB2.0

Introduction

The USB-C Multi-function docking station provides USB-A, Type-C, HDMI, and RJ45 ports, which can easily and safely connect your laptop to various peripheral devices and solve the problem of scarcity of notebook interfaces. RJ45 Ethernet port allows you to access the wired network stably and conveniently; Type-C interface supports PD3.0 quick charging protocol, which can not only connect the external power adapter to power your laptop but also charge your mobile phone at any time; HDMI interface output video supports 4K ultra high definition; USB-A interface can connect external USB devices such as mouse, keyboard, U disk, camera, etc.

Connection Diagram

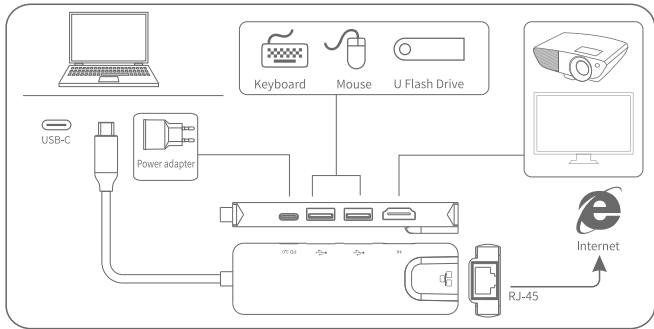

Input:

USB-C Male x 1: Plug/ Connect to phone or notebook

Output:

USB-C Female x 1: PD3.0 Protocol Charging (20V/4.2A)

USB 2.0 Female x 1: Connect to U disk, mouse, keyboard etc.

USB 3.0 Female x 1: Connect to U disk, mouse, keyboard etc.

HDMI Female x 1: Connect to TV, Monitor, Projector etc.(4K@30Hz)

Rj45 x 1: Connect to Wired Network (100M)

Specifications:

| | |
|------------------------|--|
| Connector: | |
| Power Supply | Bus-Powered and Self-Powered (via Type-C Port) |
| Input | 1 x Type-C (Male) |
| Video Output | 1 x HDMI (Female)(4K@60Hz) |
| Downstream Output Port | 1 x USB2.0 (Female), 1 x USB3.0 (Female) |
| | 1 x Type-C (Female) (PD3.0/85W) |
| | 1 x RJ45(100M) |
| Cable Length | 155mm±5MM |
| Product Body Color | Grey/Silver/Black |
| Environmental: | |
| Operating Temperature | 0° C to +45° C |
| Operating Humidity | 10% to 85 % RH |
| Storage Temperature | -10° C to +55° C |
| Storage Humidity | 5% to 90 % RH |
| Electrical: | |
| Supply power | PD 3.0 |